

MV-SI602-31GM

130

1/2"



：

• Sensor

•

• IO

RS232 Serial Port

•

•

• LED

•

•

• IP67


：

：

MV-SI602-31GM

•

：

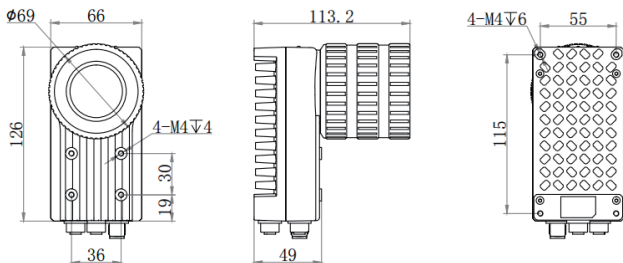

MV-SI602-31G

：

：9V~24V DC

：Intel Pro1000

：

| | | |
|--------------|---------------|----------------------------------|
| | MV-SI602-31GM | |
| | 130 | 1/2" CMOS |
| | PYTHON 1300 | |
| | 1280x1024 | |
| | 4.8μm × 4.8μm | |
| Flame Rate : | 80fps | |
| | Mono 8 | |
| | Intel X86 | Intel E3845 |
| | 1.9 GHz | |
| | DDR3 | 4GB |
| | 32GB SSD | |
| | | |
| GPIO : | 12Pin IO | 3 GPI |
| | 3 GPO | 1 232 |
| | 1 | 232 |
| | 1 | Code 39 Code 93 Code 128 CodaBar |
| | 2 | QR Micro QR Datamatrix |
| | | |
| | 9-24V DC | |
| | MV-SI602-31GM | 24.0W@ 24VDC |
| | 0~50 | -30~70 |
| | MV-SI602-31GM | 126*66*113.2(mm) |
| | MV-SI602-31GM | 750g |
| | C-Mount | |
| / | MV-SI602-31GM | |
| /USB | | |
| | SmartMVS | |
| IP : | IP67() | |
| | CE FCC RoHS | |



官方网站

unitech electronics co.,ltd.

http://tw.ute.com info@tw.ute.com

0800-033-388



| | | | | |
|---|-----------|-----------------|----------|-----------------|
| ■ | 236 4 | 02-27917988#708 | 51 15 A1 | 04-23191488#169 |
| | 2 11 10 4 | 03-4939110#61 | () | 496 2 |
| | 32 3 5 | 03-5600399#66 | 8 7 | 06-2153008#61 |
| | | | | 07-3317666#285 |

Unitech America Unitech Europe Unitech Japan Unitech Asia Pacific Unitech China Unitech Taiwan

